
WSR-40 High Frequency Inverter X-ray System

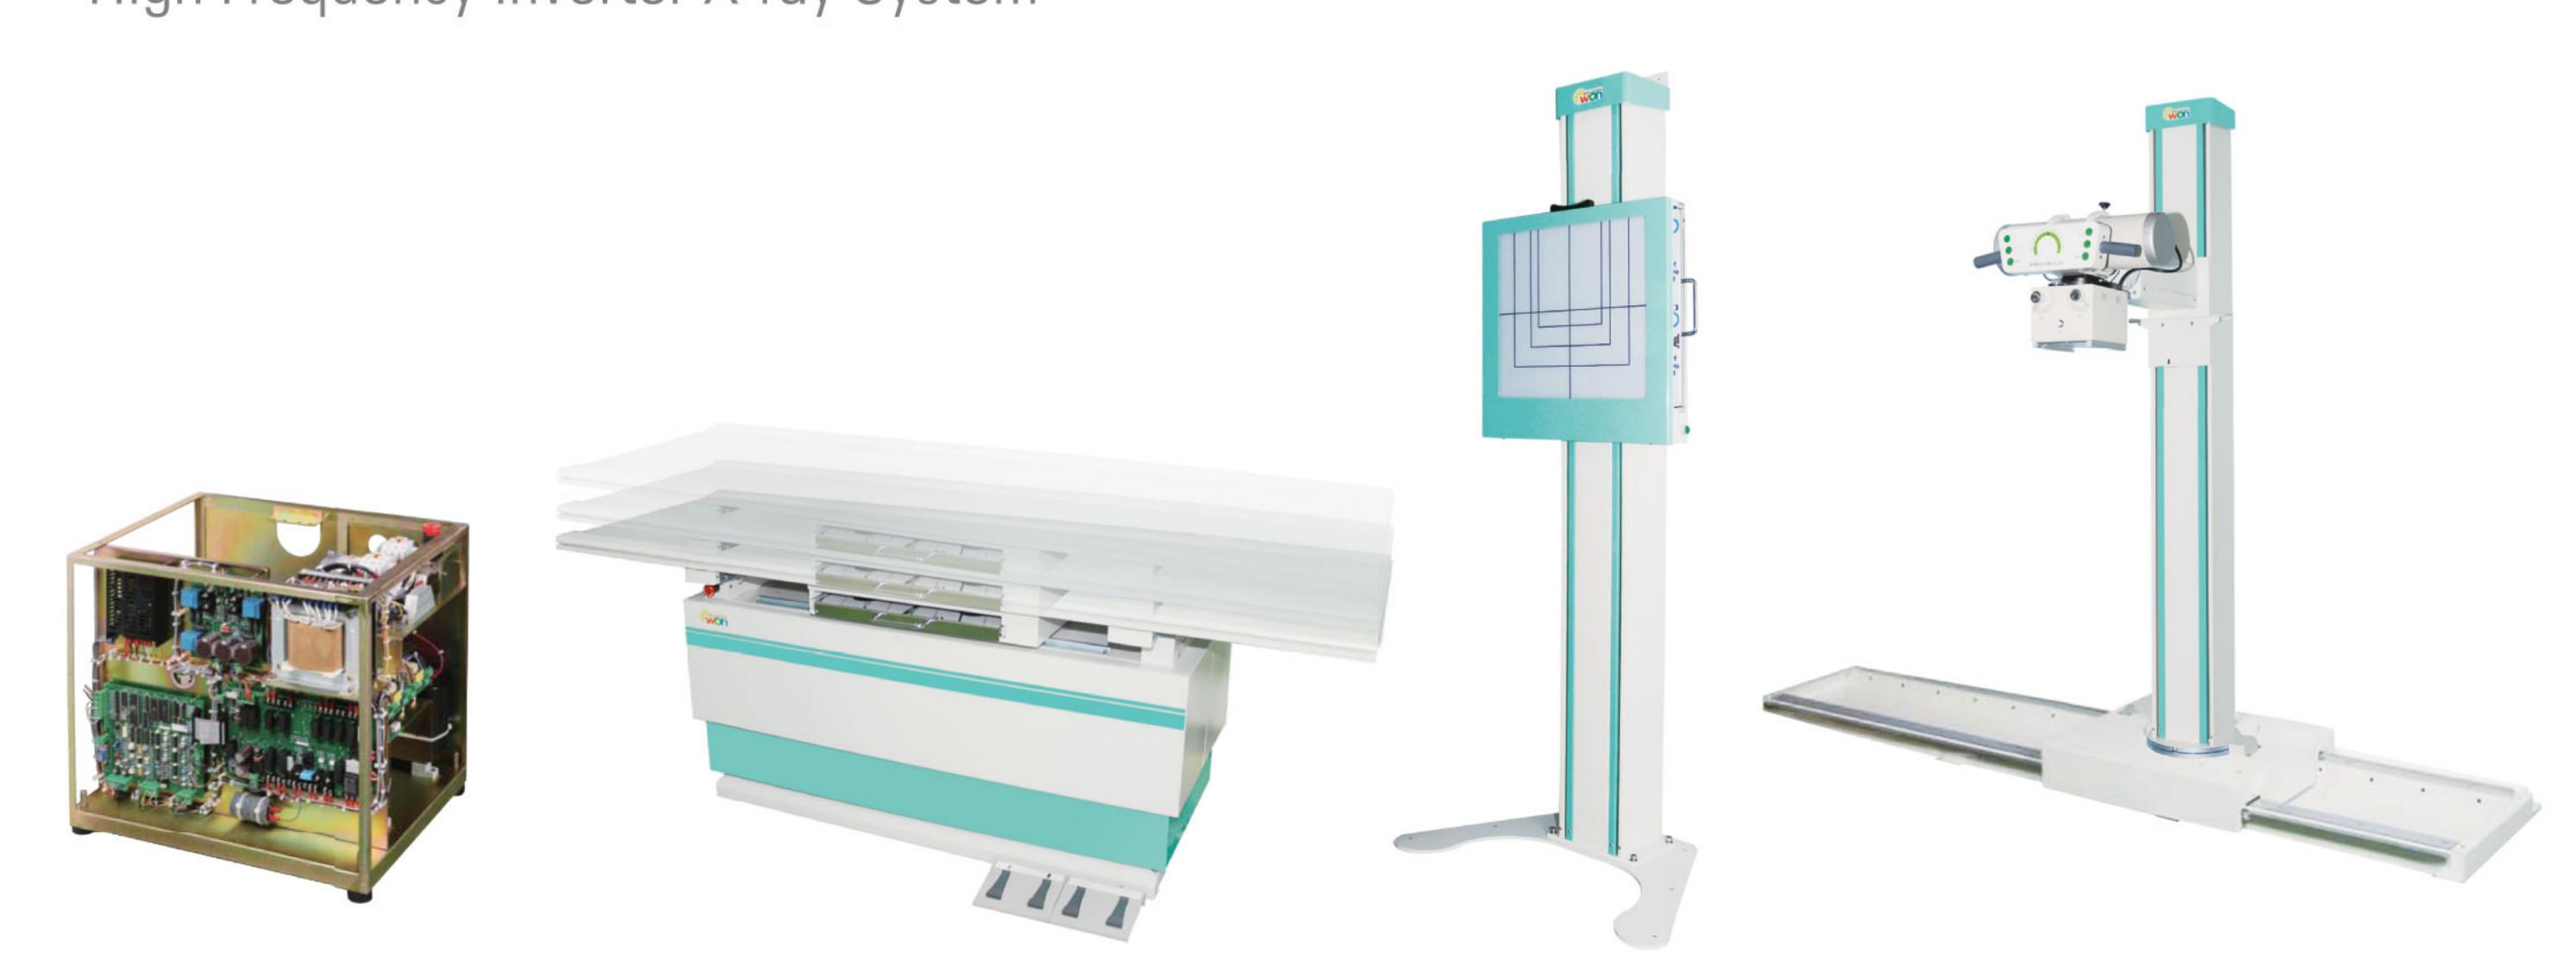

Can reduce shooting time about 50% than general method when

WSR-40 system films human body by high frequency inverter method and because control console is small and light, is possible by wall tapestry and Radiographic is available by remote control switch conveniently that user films. And have A.P. R function to basis.

SPECIFICATIONS

Component	Item	WSR-40
	kVp Range	40~125kV
	mA Range	50mA ~ 500mA
	mAs Range	0.5mAs ~ 600mAs
Consol&	Time Range	0.01 ~ 6sec
Generator	Sys-Self	LED code display
	Diagnosis	
	A.P. R	576kinds
	Output Frequency	60KHZ
Tube unit	Tube Voltage	500mA/125kvp
	Anode Heat	140,000HU
Tube Stand	U/D mov. dis	Approx. 1300mm (680 to 1980mm)
	L/D mov. dis	Approx. 1480mm Rail 2400mm
	Revo. angle	360°
Table	L/R mov. dis	±350mm (2,000L x 728W x 710H)
Collimator	Lighting	More than 160 Lux at SID 100cm
H.T cable	kvp Range	Max. 150kVp
Option	Bucky Stand	
	Ceiling	
	6way- table	

















WSR-40

High Frequency Inverter X-ray System



